

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
19 May 2005 (19.05.2005)

PCT

(10) International Publication Number  
**WO 2005/046184 A1**

(51) International Patent Classification<sup>7</sup>: **H04L 29/12,**  
G06F 17/30

Anthony [GB/GB]; 14 Grendon Gardens, Wembley Park,  
Middlesex HA9 9NE (GB). **FOAKES, Simon, E.** [GB/—];  
\* (\*\*).

(21) International Application Number:  
PCT/GB2004/004639

(74) Agent: **MURGITROYD & COMPANY**; 165-169 Scot-  
land Street, Glasgow G5 8PL (GB).

(22) International Filing Date:  
4 November 2004 (04.11.2004)

(81) Designated States (*unless otherwise indicated, for every  
kind of national protection available*): AE, AG, AL, AM,  
AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,  
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,  
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,  
KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD,  
MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG,  
PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM,  
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM,  
ZW.

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
0325691.4 4 November 2003 (04.11.2003) GB

(71) Applicant (*for all designated States except US*): **DOT-  
WORLDS LTD** [GB/GB]; 4th Floor, Elvin House, Sta-  
dium Way, Wembley, Middlesex HA9 0DW (GB).


(72) Inventors; and

(84) Designated States (*unless otherwise indicated, for every  
kind of regional protection available*): ARIPO (BW, GH,  
GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,

(75) Inventors/Applicants (*for US only*): **RETKIN, Brian,**

[Continued on next page]

(54) Title: RESOLUTION OF DOMAIN NAMES

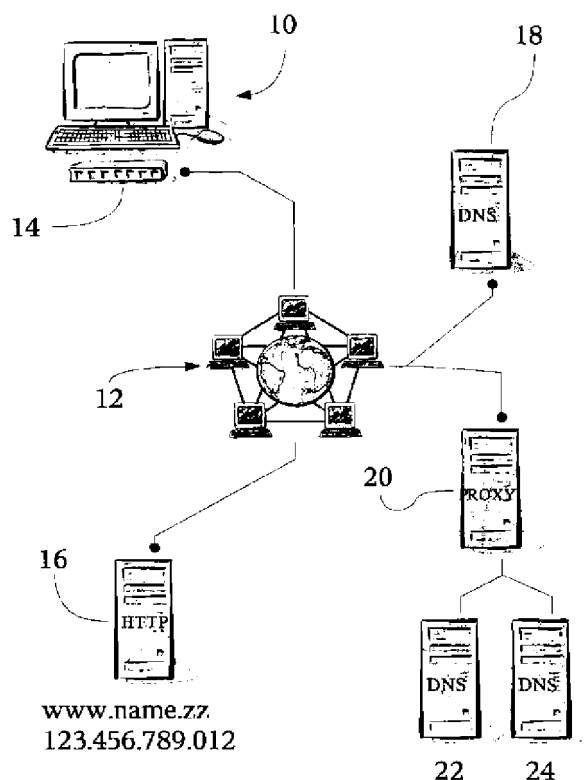

(57) Abstract: A plugin for an Internet web browser is disclosed. The plugin operates upon detection of a DNS look-up failure to attempt a DNS look-up on an alternative name server. By providing this functionality in a browser plugin, installation and operation are transparent to the user. Moreover, the plugin operates only in the event of a look-up failure so resolution of names using a previously configured server is unaffected. The alternative name server can contain references to names within an arbitrary namespace that can be determined by the operator of the server.

WO 2005/046184 A1



ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),  
European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI,  
FR, GB, GR, HU, IE, IS, IT, LU, MC, NL, PL, PT, RO, SE,  
SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,  
GW, ML, MR, NE, SN, TD, TG).

**Published:**

— with international search report

— before the expiration of the time limit for amending the  
claims and to be republished in the event of receipt of  
amendments

For two-letter codes and other abbreviations, refer to the "Guid-  
ance Notes on Codes and Abbreviations" appearing at the begin-  
ning of each regular issue of the PCT Gazette.

### **Resolution of network names**

5 This invention relates to resolution of network names.

Most users of a computer network, and in particular, the Internet, rely on symbolic names to identify hosts and domains on the network. The symbolic names must be translated into machine addresses (IP addresses, in the case of the Internet) to enable data to be routed to and from a host. The relation between symbolic names and  
10 addresses was originally maintained in a host file on each machine on the network. However, as networks grew in size, maintenance of host databases became an ever-increasing burden, so the task was entrusted to name resolution (DNS) servers that maintain a centralised database of names and addresses.

Owners of private networks have virtually unlimited control over the names that can be  
15 used in their networks. However, in the context of the Internet, domain names are normally resolved with reference to DNS servers that are maintained by an Internet service provider or a broadband provider. Such servers operate within a hierarchy of servers, ultimately controlled by The Internet Corporation for Assigned Names and Numbers (ICANN). The policies of ICANN, and national domain registers recognised  
20 by ICANN restrict the choice of names that can be obtained by users.

In principle, anyone could set up a publicly-accessible DNS server upon which they can record arbitrary names, and make the address of the server known. An Internet user could then add the server's address to the list of DNS servers accessed by their computer when a name is to be resolved. This would be quite acceptable to experienced users.

-2-

However, many users access the Internet through a dial-up connection that configures their computer's settings, including DNS server addresses, automatically using the dynamic host configuration protocol (DHCP). Such users may not be competent to or authorised to configure their computer's settings manually.

- 5 An aim of this invention is to provide a system whereby an Internet user can access a domain namespace that contains arbitrary names without the need to reconfigure their computer manually.

From a first aspect, this invention provides a plugin for a browser, which operates upon detection of a DNS look-up failure to attempt a DNS look-up on an alternative name  
10 server.

By providing this functionality in a browser plugin, installation and operation are transparent to the user. Moreover, the plugin operates only in the event of a look-up failure so resolution of names using a previously configured server is unaffected.

The plugin may operate by detecting when the browser is about to display an error to  
15 inform a user that a referenced name cannot be found. It may then perform a further name lookup before the error is displayed. This can be achieved readily by providing a script to execute in the context of the browser.

The plugin may be suitable for installation in a web browser by being downloaded from a remote web site. Preferably, the plugin is packaged with an installer that installs the  
20 plugin with a minimum of user intervention.

To ensure that the plugin always directs its look-ups to a valid alternative DNS server, it may be operative to contact a remote server to obtain data relating to the alternative name server. For example, the data may be obtained each time the operating system is started or each time the plugin is initiated.

-3-

For example, the plugin may operate by configuring proxy server settings of a web browser in which it is installed. A plugin embodying the invention may communicate with the alternative DNS sever through a proxy server.

5 From a second aspect, this invention provides a web browser that has a plugin that operates upon detection of a DNS look-up failure to attempt a DNS look-up on an alternative name server. The browser may be configured by the plugin to refer DNS look-ups to an alternative server through configuration of its proxy settings. This is advantageous because the proxy settings of many browsers can be configured by configuration of the contents of a settings file.

10 From a third aspect, this invention provides a method of resolving a network name, the method comprising:

using a browser to make a request for a resource with reference to a host by name;

attempting to resolve the name by reference to a first DNS system; and

15 in the event that the browser receives a negative response from the DNS system, it executes a plugin that attempts to resolve the name from an alternative server.

An embodiment of the invention will now be described in detail, by way of example, and with reference to the accompanying drawings, in which:

Figure 1 is a schematic diagram of a computer operating a browser embodying the  
20 invention to communicate with Internet locations.

To place the embodiment in context, a brief overview of the operation of a computer running an Internet browser will now be described.

-4-

A browser is normally an unprivileged user program executing on a networked client computer 10. In this example, the client computer 10 is a stand-alone computer that is connected to the Internet 12 through a dial-up device 14 such as ISDN or DSL terminal adapter or a modem. The browser can receive a request for a resource (e.g., a web page or a file on an ftp site), download that resource from a remote server 16, and do something with it on the client computer 10, such as render it, if it is a web page, or save it if it is a binary file.

A resource is identified by a string called a uniform resource location (URL) that identifies the host upon which the resource is to be found (in this example, the fictitious www.name.zz) and the location of the resource on the host. The host may be identified by its IP address (shown, again fictitiously, as 123.456.789.012) in dotted-decimal form, but it is more usually identified by a symbolic name. In the latter case, the browser must translate the symbolic name into an IP address, because this address is required to address the remote host computer on which the resource is located.

To resolve an IP address, the browser makes a request to a resolver service of the operating system under which it is executing. Typically, the resolver service will first look in a local database of host names, and if the name cannot be found, it passes the request to a remote DNS server 18. The address of the remote DNS server is configured within the operating system either statically by a system administrator or dynamically using DHCP, the latter being common on computers that access the Internet by way of a dial-up connection. (In fact, most operating systems allow several DNS servers to be specified that will be referred to in turn.) There can be two outcomes of the DNS look-up. First, the look-up can be successful, in which case, the resolver will return an IP address to the browser. This address can then replace the symbolic name within the URL. Alternatively, the name look-up may fail, in which case, the resolver will return a failure code to the browser.

In the event that the DNS look-up fails, a conventional web browser displays an error message or error page to inform the user that a request for a URL cannot be met. The behaviour and configuration of a browser embodying the invention will now be

-5-

described. This embodiment will be described in the context of a computer running the Microsoft Windows operating system executing the Microsoft Internet Explorer web browser. However, it will be understood that the same principles can be applied to any other browser that can support plugins of a sufficient degree of complexity.

- 5 First, in order to prepare the browser for operation in accordance with the invention, a plugin must first be installed. This is achieved by first visiting a web site provided by the operator of a domain registration and domain name resolution service. Note that the installation need be performed only once by each user.

The user clicks on a link to download the plugin. The plugin is downloaded onto the  
10 user's computer, where the following actions occur:

- a) Five files are installed that enable the domain name resolution system to operate. These include two dynamically linked libraries in DLL files (**dotworlds.dll** and **dotdetect.dll**), two executables in EXE files (**execdll.exe** and **kill.exe**) and a proxy configuration script in a PAC file (**dotworlds.pac**).
- 15 b) The dynamically linked libraries, the executables and the proxy configuration script are installed in the standard directory for such files in the Microsoft Windows file system.
- c) The following items are written to the Microsoft Windows registry: Run key entry to run **dotdetect.exe**, which starts **execdll.exe**, plugin version entries and uninstall  
20 configurations.

The registry key for running the plugin at start-up is:

HKEY\_LOCAL\_MACHINE\SOFTWARE\Microsoft\Windows\CurrentVersion\Run

-6-

The registry key for adding the plugin to add/remove programs feature of Microsoft windows:

HKEY\_LOCAL\_MACHINE\SOFTWARE\Microsoft\Windows\CurrentVersion\Uninstall\Dotworlds

- 5 d) An uninstall system for the plugin package is also installed (unsdot.exe in Program Files stabdar folder, dotworlds sub folder).

The file **dotworlds.dll** is a function library that exports functions required by the plugin. The file **dotdetect.dll** detects the function library and runs the **execdll.exe** file. The executable **execdll.exe** serves to detect an Internet connection, configure the connection  
10 and update the proxy configuration file. The executable **kill.exe** is used during the uninstall process. The purpose of the proxy configuration file is to offer proxy configurations for the browser.

In the context of Microsoft Internet Explorer web browser, a user can configure separate proxy settings for use with each Internet dial-up account that is configured in the  
15 operating system. After installation, the plugin configures the user's current connection to use the proxy settings specified in the proxy configuration file. This can be achieved by activating the automatic configuration script option in Internet Explorer. Specifically, this is done by functions in **dotdetect.dll**, running **execdll.exe** during system start-up

- 20 To ensure use of the automatic configuration script on any Internet connection, and to ensure that the information in the proxy configuration file is up to date, the library **dotdetect.dll** is run whenever Microsoft Windows is started, this activating the **execdll.exe** executable. The executable **execdll.exe** starts a process that runs in the background and waits until an Internet connection is detected. Once this occurs, the  
25 process configures the current connection (from within the browser) to use the automatic configuration script (written to the proxy configuration file). The process file also checks the IP/domain configurations required by the proxy configuration file by visiting a server provided by the operator of the domain registry, from where it downloads a remote configuration file. The information in the remote configuration file is then re-



-7-

written to the proxy configuration file, so that the configuration script always uses up-to-date proxy IP information. This allows changes in the operator's systems to be communicated transparently to the user's computer. Having run once, the process then shuts down.

- 5 Once the above installation procedures have been performed, operation of the browser can continue.

Now consider what occurs if the remote DNS server 18 is unable to find the name requested (as would be the case with domains registered by the operator of the domain registry). The configuration script is used for every name lookup, but it tells the browser  
10 to use its normal configurations first, and only the alternative proxy configurations in case of error. Therefore, before the browser informs the user with of an error condition (having been configured to use the automatic configuration script) the browser uses the information contained in the proxy configuration script (found in the proxy configuration file) to try to resolve the URL using an alternative IP address, in this case,  
15 pointing to a proxy server 20 run by the operator of the domain registry. This proxy server is in turn linked in to two proprietary DNS servers 22, 24, which have been configured to resolve the domains offered by the operator of the registry, optionally along with all other conventional domain names. The browser makes the URL request to the proxy server 20, which in turn resolves the URL (if it can) using the proprietary  
20 DNS servers 22, 24, returning the correct IP address for the domain to the browser. This means that the operator's domain names are true domain names and not sub-domains of other ICANN domains. In this example, .zz is not a valid extension within the ICANN naming system, but can, should a user wish, be registered within the proprietary DNS server.


- 25 Thus, a domain registrar can install a DNS server, with an optional redundant second server. These may be made directly available over the Internet or may be protected by a proxy server.

**Claims**

- 5 1. A plugin for a browser, which plugin operates upon detection of a DNS look-up failure to attempt a DNS look-up on an alternative name server.
2. A plugin according to claim 1 in that operates by detecting when the browser is about to display an error to inform a user that a referenced name cannot be found.
3. A plugin according to claim 2 in which the plugins perform a further name lookup  
10 before the error is displayed.
4. A plugin according to claim 2 or claim 3 in which This can be achieved readily by providing a script to execute in the context of the browser.
5. A plugin according to any preceding claim that is suitable for installation in a web browser by being downloaded from a remote web site.
- 15 6. A plugin according to claim 5 that is packaged with an installer that installs the plugin with a minimum of user intervention.
7. A plugin according to any preceding claim that is operative to contact a remote server to obtain data relating to the alternative name server.
8. A plugin according to claim 7 in which the data may be obtained each time the  
20 operating system is started or each time the plugin is initiated.

-9-

9. A plugin according to any preceding claim that operates by configuring proxy server settings of a web browser in which it is installed.
10. A plugin according to any preceding claim that communicates with the alternative DNS sever through a proxy server.
- 5 11. A plugin for a web browser substantially as herein described with reference to the accompanying drawing.
12. A web browser that has a plugin that operates upon detection of a DNS look-up failure to attempt a DNS look-up on an alternative name server.
13. A web browser according to claim 12 that is configured by the plugin to refer DNS  
10 look-ups to an alternative server through configuration of its proxy settings.
14. A method of resolving a network name, the method comprising: using a browser to make a request for a resource with reference to a host by name; attempting to resolve the name by reference to a first DNS system; and in the event that the browser receives a negative response from the DNS system, it executes a configuration file  
15 that attempts to resolve the name from an alternative server.

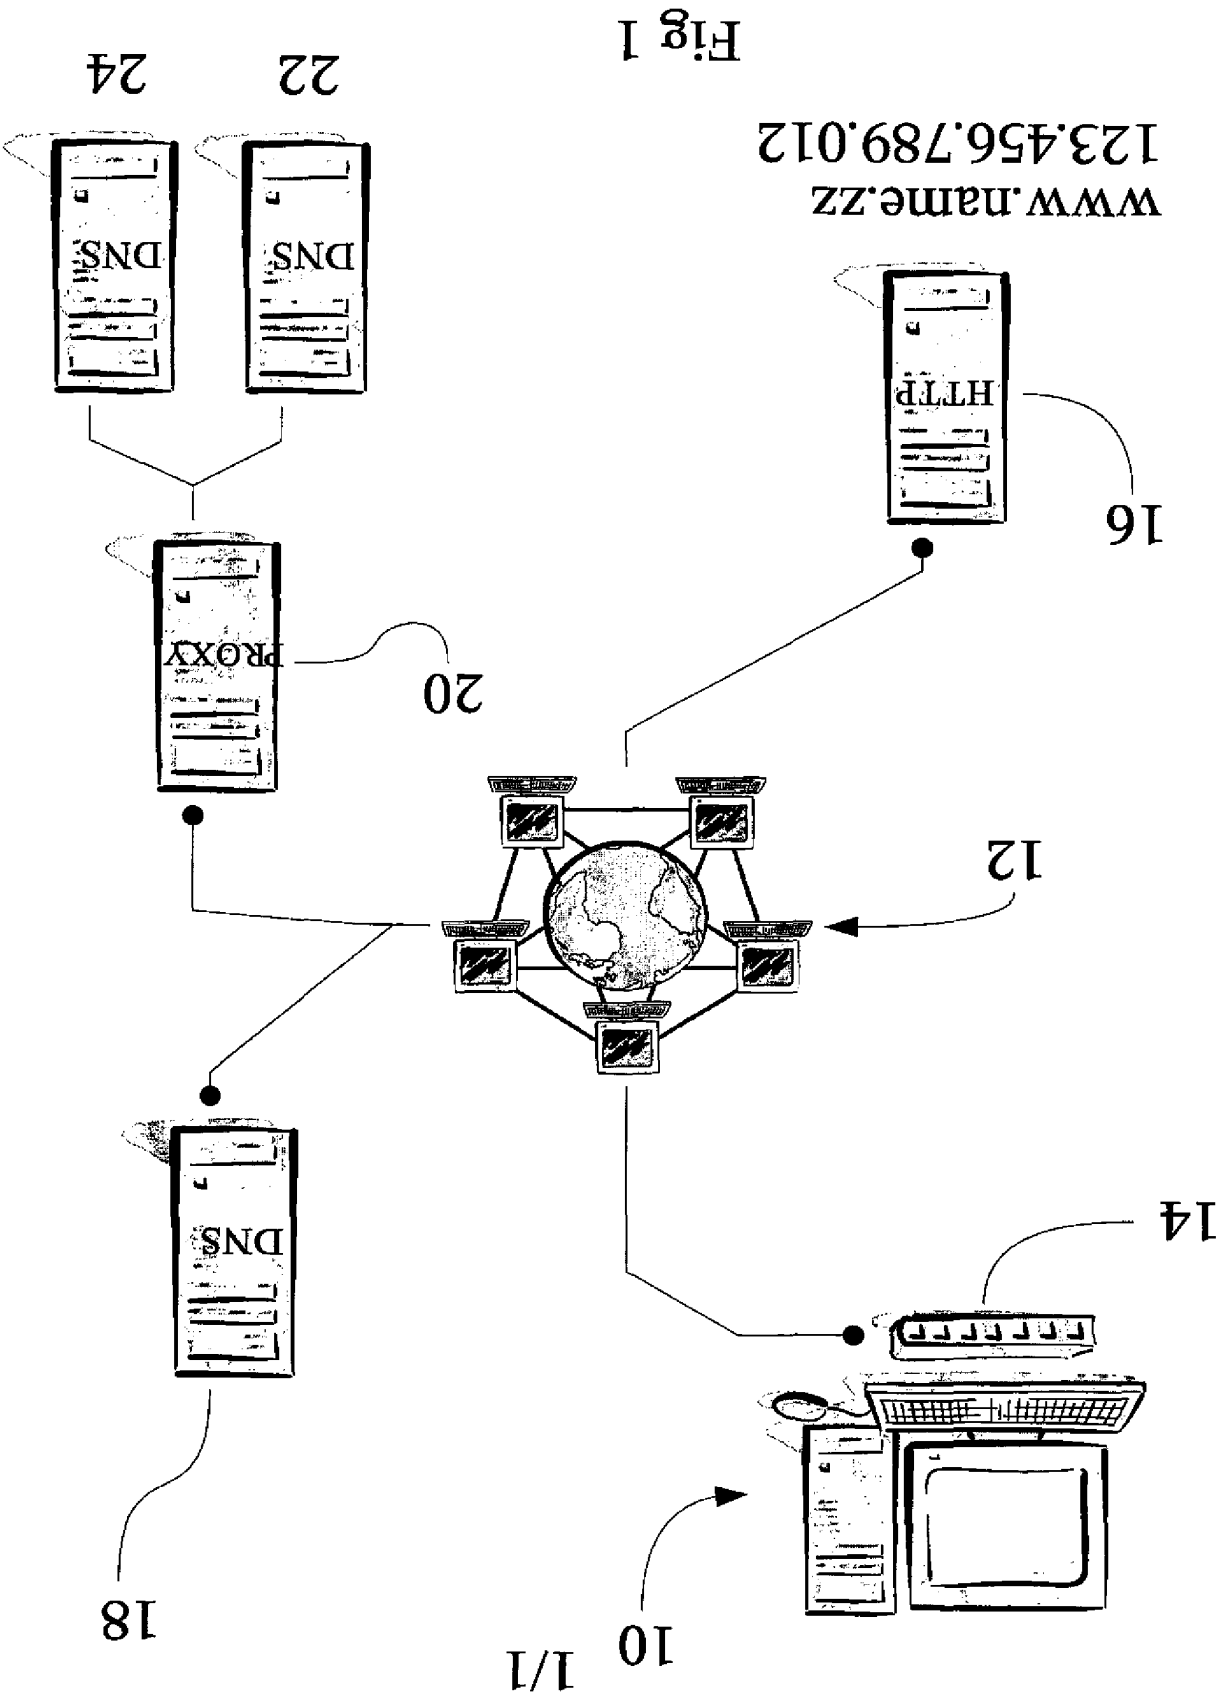

# INTERNATIONAL SEARCH REPORT

Int Application No  
PCT/GB2004/004639

**A. CLASSIFICATION OF SUBJECT MATTER**  
IPC 7 H04L29/12 G06F17/30

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)  
IPC 7 H04L G06F

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, INSPEC, IBM-TDB, PAJ, WPI Data

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	MOCKAPETRIS P: "RFC 1034 Domain Names - Concepts and Facilities"	1,3-14
A	NETWORK WORKING GROUP REQUEST FOR COMMENTS, XX, XX, November 1987 (1987-11), pages 1-55, XP002278155	2
A	page 6 - page 7, paragraph 3 page 15, last paragraph - page 16 page 22 - page 25 ----- US 2002/059396 A1 (HOLZER DIPL.-ING. RENE ET AL) 16 May 2002 (2002-05-16) abstract page 1, paragraph 13 page 2, paragraph 18 - paragraph 21 ----- -/-	2,3

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

\* Special categories of cited documents:

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

- "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- "&" document member of the same patent family

Date of the actual completion of the international search

14 March 2005

Date of mailing of the international search report

18/03/2005

Name and mailing address of the ISA  
European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Riegler, J

# INTERNATIONAL SEARCH REPORT

Inte.....al Application No  
PCT/GB2004/004639

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	WO 02/13057 A (SHARINGA NETWORKS INC; LEISHMAN, CHRISTOPHER; LOW, SYDNEY, GORDON; WAL) 14 February 2002 (2002-02-14) abstract page 4, line 11 - page 5, line 15 -----	1,12,14
A	ANONYMOUS URL - HTTP://DEVELOPER.NETSCAPE.COM/DOCS/MANUALS /COMMUNICATOR/PLUGINDEX.HTM DWWW- 1997-01-15: "Plug-in Guide, Chapter 1: Plug-in Basics" NETSCAPE COMMUNICATOR MANUAL, 15 January 1997 (1997-01-15), XP002252262 the whole document -----	1-14

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/GB2004/004639

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2002059396 A1	16-05-2002	DE 10048112 A1 EP 1193941 A2	18-04-2002 03-04-2002
WO 0213057 A	14-02-2002	WO 0213057 A1 AU 7740001 A	14-02-2002 18-02-2002